



Paper Type: Original Article

Multi-Criteria Decision Making Model for Analysis Hydrogen Production for Economic Feasibility and Sustainable Energy

Mohamed Abouhawwash ^{1,*} , Mohammed Jameel ²  and Sameh S. Askar ³ 

¹ Department of Computational Mathematics, Science, and Engineering (CMSE), College of Engineering, Michigan State University, East Lansing, MI 48824, USA; abouhaww@msu.edu.

² Department of Mathematics, Faculty of Science, Sana'a University, Sana'a 13509, Yemen; moh.jameel@su.edu.ye.

³ Department of Statistics and Operations Research, College of Science, King Saud University, Riyadh 11451, Saudi Arabia; saskar@ksu.edu.sa;

Received: 30 Apr 2023

Revised: 10 Jul 2023

Accepted: 17 Aug 2023

Published: 25 Aug 2023

Abstract

Hydrogen production is pivotal to achieving economic feasibility and sustainable energy systems. This study provides an overview of the criteria for the economic feasibility of hydrogen production and sustainable energy, highlighting the key factors contributing to its viability. Factors such as cost-effectiveness, energy efficiency, carbon emissions, feedstock availability and sustainability, scalability, infrastructure compatibility, water usage, life cycle assessment, technological readiness, and policy support are discussed. By considering these criteria, hydrogen production methods can be evaluated and optimized to ensure economic viability and contribute to the development of sustainable energy systems. We used the multi-criteria decision-making (MCDM) model for various criteria and factors. We used the MULTIMOORA method as an MCDM model to analyse the hydrogen production criteria and select the best alternatives. We compute the weights of criteria using the average method. Then, we used the MULTIMOORA method to rank the other options. The results show that cost-effectiveness has the highest weight, followed by energy efficiency, and the policy criterion has the lowest weight. Then, we used the sensitivity analysis to ensure the stability of the results.

Keywords: Multi-Criteria Decision Making; MULTIMOORA; Economic feasibility; Sustainability.

1 | Introduction

Hydrogen, the most abundant element in the universe, holds tremendous potential as a versatile and clean energy carrier. Its production represents a critical pathway towards achieving economic feasibility and sustainable energy systems [1, 2]. Hydrogen can be used as a transportation fuel, a renewable energy storage medium, and a feedstock for various industrial processes. However, efficient and sustainable hydrogen production methods are essential to fully realizing its benefits [3–6]. The production of hydrogen involves the splitting of water molecules (electrolysis) or the reforming of hydrocarbon-based fuels such as natural gas or biomass. These processes can be energy-intensive and may generate carbon emissions unless appropriate



Corresponding Author: abouhaww@msu.edu



<https://doi.org/10.61356/j.mawa.2023.16161>



Licensee **Multicriteria Algorithms with Applications**. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<http://creativecommons.org/licenses/by/4.0>).

measures are taken [2, 7-8]. Therefore, ensuring economic feasibility and sustainability in hydrogen production requires careful consideration of several vital factors [9–11].

This study examines the criteria for hydrogen production, economic feasibility, and sustainable energy. It explores the various aspects contributing to the viability of hydrogen production methods, considering cost-effectiveness, energy efficiency, carbon emissions, feedstock availability and sustainability, scalability, infrastructure compatibility, water usage, life cycle assessment, technological readiness, and policy support [12–14].

By evaluating hydrogen production methods against these criteria, decision-makers can make informed choices to promote economically viable and sustainable hydrogen production. Such decisions can lead to the development of efficient and environmentally friendly processes, ultimately driving the transition towards a cleaner and more sustainable energy future [15–18].

The selection of technique relies on the resources available and the intended use of hydrogen. Each approach has pros and cons of its own. A decision-making approach must be used to examine these elements to assess the benefits and drawbacks of each component. MCDM evaluates and prioritises potential solutions by considering several contradictory factors [19, 20]. MCDM may assess and compare several choices for generating, distributing, and utilising hydrogen as a fuel in hydrogen resource management. Some assessment criteria include economic cost, environmental effect, technological feasibility, and popularity with society [21–23].

MCDM has emerged as a reliable method for delving into complex problems from the standpoint of critically evaluating the alternatives in light of several criteria to choose the most logical options. We used the MULTIMOORA method to analyze the criteria for hydrogen production [24–26].

2 | MULTIMOORA Method

The MULTIMOORA method has three steps: ratio system, reference point, and full multiplicative form. The alternatives are ranked based on three steps, and then the final rank is computed by the dominance theory [27-29]. Figure 1 shows the steps of the MULTIMOORA method.



Figure 1. The steps of the MULTIMOORA method.

Step 1. Building of Decision Making

There are a set of criteria $HPC = (HPC_1, HPC_2, \dots, HPC_m); i = 1, 2, \dots, m$ and a set of alternatives $HPA = (HPA_1, HPA_2, \dots, HPA_n); j = 1, 2, \dots, n$.

Step 2. Normalize the decision making.

$$u_{ij} = \frac{a_{ij}}{\sum_{j=1}^m a_{ij}} \quad (1)$$

Step 3. Compute the weight of decision making.

The weights of criteria are computed w_j

Step 4. Compute the ratio system

$$q_i = q_i^+ - q_i^- \quad (2)$$

$$q_i^+ = \sum_{j=1}^m w_j u_{ij} \quad (3)$$

$$q_i^- = \sum_{j=1}^m w_j u_{ij} \quad (4)$$

Step 5. Compute the reference point

$$g_i^{max} = \max_j (w_j |u_j^* - u_{ij}|) \quad (5)$$

$$u_j^* = \begin{cases} \max_i u_{ij} & \text{positive criteria} \\ \min_i u_{ij} & \text{negative criteria} \end{cases} \quad (6)$$

Step 6. Compute the full multiplicative form

$$f_i = \frac{s_i}{z_i} \quad (7)$$

$$s_i = \prod_{j=1}^m w_j u_{ij} \text{ positive criteria} \quad (8)$$

$$z_i = \prod_{j=1}^m w_j u_{ij} \text{ negative criteria} \quad (9)$$

Step 7. Compute the final rank.

3 | Results

We gathered ten criteria and 15 alternatives in this study to analysis the hydrogen production to achieve sustainability.

Criteria for Hydrogen Production Economic Feasibility and Sustainable Energy:

- **Cost-effectiveness:** One of the critical criteria for hydrogen production is its economic feasibility. The cost of hydrogen production should be competitive with alternative energy sources to ensure widespread adoption. Factors such as capital investment, operational costs, and the availability and cost of feedstock play a crucial role in determining the economic viability of hydrogen production methods.
- **Energy efficiency:** The energy efficiency of hydrogen production processes is essential for sustainable energy production. The energy required to produce hydrogen should be minimized to ensure a favourable energy balance. High energy efficiency reduces the environmental impact and improves the sustainability of hydrogen production systems.
- **Carbon emissions:** hydrogen production methods should aim to minimize or eliminate carbon emissions. Carbon capture and utilization technologies can reduce or capture carbon emissions associated with hydrogen production. Green hydrogen, produced from renewable energy sources without carbon emissions, is desirable for sustainable energy applications.
- **Feedstock availability and sustainability:** The availability and sustainability of feedstock used for hydrogen production are critical factors. Hydrogen can be produced from diverse sources such as water, natural gas, biomass, or waste materials. Sustainable feedstock options, such as renewable

sources or waste materials, should be prioritized to minimize environmental impact and ensure long-term availability.

- **Scalability:** Scalability is crucial for hydrogen production methods' widespread adoption and commercial viability. The production systems should be able to scale up to meet increasing demand without compromising efficiency or incurring excessive costs. Scalability ensures that hydrogen can be produced sufficiently to support various applications, including transportation, energy storage, and industrial processes.
- **Infrastructure compatibility:** The existing energy infrastructure plays a significant role in hydrogen production's economic feasibility and sustainability. Compatibility with existing infrastructure, such as pipelines, storage facilities, and distribution networks, can reduce the costs associated with hydrogen transportation and distribution. Adapting or expanding infrastructure to accommodate hydrogen production and utilization is essential for successfully integrating into the energy system.
- **Water usage:** Hydrogen production methods that require water should consider the availability and sustainable use of water resources. Water scarcity is a global concern, and hydrogen production processes should aim to minimize water consumption or utilize alternative water sources, such as wastewater or seawater, to ensure sustainable water management.
- **Life cycle assessment:** A comprehensive life cycle assessment (LCA) of hydrogen production methods is crucial for evaluating their environmental impact. LCA considers the entire life cycle of hydrogen production, including feedstock extraction, processing, transportation, and end-use. It assesses factors such as resource depletion, greenhouse gas emissions, and other environmental impacts to ensure the sustainability of hydrogen production methods.
- **Technological readiness and innovation:** The technological readiness and potential for innovation in hydrogen production methods are crucial for continuous improvement and cost reduction. Research and development efforts should focus on advancing technologies, such as electrolysis, biomass conversion, or photocatalysis, to improve efficiency, reduce costs, and enhance the sustainability of hydrogen production.
- **Policy and regulatory support:** Government policies and regulations significantly promote economic feasibility and sustainable energy production from hydrogen. Supportive policies, such as financial incentives, carbon pricing, research funding, and regulatory frameworks, can encourage investment, promote innovation, and create a favourable market environment for hydrogen production.

Hydrogen production methods can be evaluated for their economic feasibility and contribution to sustainable energy production by considering these criteria. Balancing cost-effectiveness, energy efficiency, carbon emissions, feedstock sustainability, scalability, infrastructure compatibility, water usage, life cycle assessment, technological readiness, and policy support is essential for realizing the full potential of hydrogen as a sustainable energy carrier.

Step 1. Building of Decision Making between criteria and 15 alternatives by the crisp values between 1 and 9.

Step 2. Normalize the decision making by Eq. (1) as shown in Table 1.

Table 1. The normalization decision matrix.

	HPC ₁	HPC ₂	HPC ₃	HPC ₄	HPC ₅	HPC ₆	HPC ₇	HPC ₈	HPC ₉	HPC ₁₀
HPA ₁	0.0232 55814	0.0595 24	0.0927 84	0.0888 89	0.0786 52	0.0459 77	0.1034 48	0.0705 88	0.0888 89	0.0430 11
HPA ₂	0.0697 67442	0.1071 43	0.0515 46	0.0666 67	0.0337 08	0.0229 89	0.0114 94	0.0470 59	0.0555 56	0.0537 63
HPA ₃	0.0348 83721	0.0595 24	0.0927 84	0.0888 89	0.0674 16	0.0919 54	0.1034 48	0.0588 24	0.0666 67	0.0645 16
HPA ₄	0.0697 67442	0.0357 14	0.0927 84	0.0444 44	0.0561 8	0.0689 66	0.0229 89	0.0352 94	0.1 0.1	0.0967 74
HPA ₅	0.0232 55814	0.0714 29	0.0618 56	0.0444 44	0.0561 8	0.0689 66	0.0229 89	0.1058 82	0.0333 33	0.0860 22
HPA ₆	0.0581 39535	0.0238 1	0.0515 46	0.0333 33	0.0898 88	0.0689 66	0.0344 83	0.0705 88	0.0222 22	0.0215 05
HPA ₇	0.0465 11628	0.0595 24	0.0206 19	0.0555 56	0.0449 44	0.1034 48	0.0689 66	0.0235 29	0.0555 56	0.0322 58
HPA ₈	0.0813 95349	0.0952 38	0.0309 28	0.0222 22	0.0786 52	0.0574 71	0.1034 48	0.0588 24	0.0666 67	0.0645 16
HPA ₉	0.0930 23256	0.1071 43	0.0618 56	0.0666 67	0.1011 24	0.0229 89	0.0919 54	0.0941 18	0.1 0.1	0.0537 63
HPA ₁₀	0.1046 51163	0.0714 29	0.0927 84	0.1 0.1	0.0674 16	0.0574 71	0.0574 71	0.0352 94	0.0888 89	0.0430 11
HPA ₁₁	0.0697 67442	0.0595 24	0.0721 65	0.0888 89	0.0561 8	0.0344 83	0.0804 6	0.0235 29	0.0555 56	0.0860 22
HPA ₁₂	0.1046 51163	0.0476 19	0.0824 74	0.0777 78	0.0898 88	0.1034 48	0.0459 77	0.0705 88	0.0888 89	0.0967 74
HPA ₁₃	0.0930 23256	0.0833 33	0.0927 84	0.0666 67	0.0561 8	0.0804 6	0.0919 54	0.1058 82	0.0555 56	0.0752 69
HPA ₁₄	0.0581 39535	0.0833 33	0.0824 74	0.1 0.1	0.0786 52	0.0919 54	0.0574 71	0.1058 82	0.0444 44	0.0860 22
HPA ₁₅	0.0697 67442	0.0357 14	0.0206 19	0.0555 56	0.0449 44	0.0804 6	0.1034 48	0.0941 18	0.0777 78	0.0967 74

Step 3. Compute the weight of decision making by the average method as shown in Figure 2. Then compute the weighted normalized decision matrix as shown in Table 2. We observed the cost effectiveness criterion is the highest weight and policy criterion is the least weight.

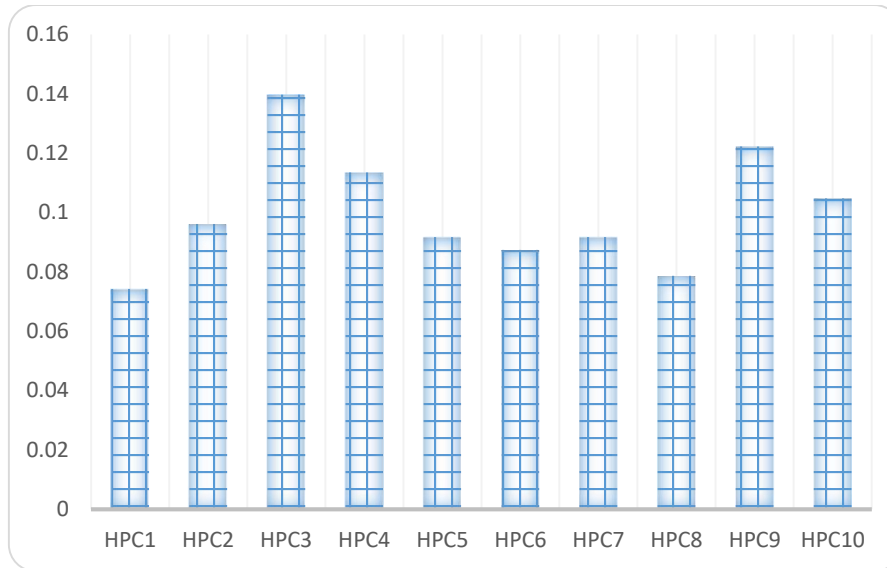


Figure 2. The weights of 15 criteria.

Table 2. The weighted normalized decision matrix.

	HPA ₁	HPA ₂	HPA ₃	HPA ₄	HPA ₅	HPA ₆	HPA ₇	HPA ₈	HPA ₉	HPA ₁₀	HPA ₁₁
HPC ₁	0.0017 26414	0.0051 79242	0.0025 89621	0.0051 79242	0.0017 26414	0.0043 16035	0.0034 52828	0.0060 42449	0.0069 05657	0.0077 68864	0.0051 79242
HPC ₂	0.0057 18	0.0102 93	0.0057 18	0.0034 31	0.0068 62	0.0022 87	0.0057 18	0.0091 5	0.0102 93	0.0068 62	0.0057 18
HPC ₃	0.0129 65	0.0072 03	0.0129 65	0.0129 65	0.0086 44	0.0072 03	0.0028 81	0.0043 22	0.0086 44	0.0129 65	0.0100 84
HPC ₄	0.0100 92	0.0075 69	0.0100 92	0.0050 46	0.0050 46	0.0037 85	0.0063 08	0.0025 23	0.0075 69	0.0113 54	0.0100 92
HPC ₅	0.0072 13	0.0030 91	0.0061 82	0.0051 52	0.0051 52	0.0082 43	0.0041 21	0.0072 13	0.0092 73	0.0061 82	0.0051 52
HPC ₆	0.0040 15	0.0020 08	0.0080 31	0.0060 23	0.0060 23	0.0060 23	0.0090 35	0.0050 19	0.0020 08	0.0050 19	0.0030 12
HPC ₇	0.0094 87	0.0010 54	0.0094 87	0.0021 08	0.0021 08	0.0031 62	0.0063 24	0.0094 87	0.0084 32	0.0052 7	0.0073 78
HPC ₈	0.0055 48	0.0036 99	0.0046 24	0.0027 74	0.0083 23	0.0055 48	0.0018 49	0.0046 24	0.0073 98	0.0027 74	0.0018 49
HPC ₉	0.0108 69	0.0067 93	0.0081 51	0.0122 27	0.0040 76	0.0027 17	0.0067 93	0.0081 51	0.0122 27	0.0108 69	0.0067 93
HPC ₁₀	0.0045 08	0.0056 35	0.0067 62	0.0101 42	0.0090 15	0.0022 54	0.0033 81	0.0067 62	0.0056 35	0.0045 08	0.0090 15

HPA ₁	HPA ₁	HPA ₁	HPA ₁
2	3	4	5
0.0077 68864	0.0069 05657	0.0043 16035	0.0051 79242
0.0045 75	0.0080 06	0.0080 06	0.0034 31
0.0115 25	0.0129 65	0.0115 25	0.0028 81
0.0088 31	0.0075 69	0.0113 54	0.0063 08
0.0082 43	0.0051 52	0.0072 13	0.0041 21
0.0090 35	0.0070 27	0.0080 31	0.0070 27
0.0042 16	0.0084 32	0.0052 7	0.0094 87
0.0055 48	0.0083 23	0.0083 23	0.0073 98
0.0108 69	0.0067 93	0.0054 34	0.0095 1
0.0101 42	0.0078 88	0.0090 15	0.0101 42

Step 4. Compute the ratio system by Eqs. (2-4). Then compute the rank of alternatives as shown in Figure 3.

Step 5. Compute the reference point by Eqs. (5-6). Then compute the rank of alternatives as shown in Figure 3.

Step 6. Compute the full multiplicative form by Eqs. (7-9). Then compute the rank of alternatives as shown in Figure 4.

Step 7. Compute the final rank as shown in Figure 3.

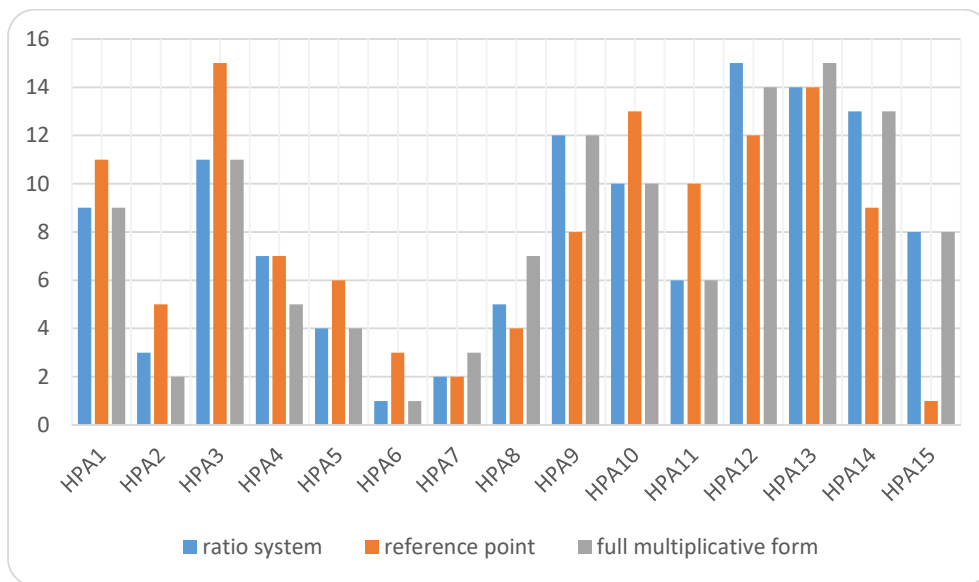


Figure 3. The rank of three steps of MULTIMOORA method.

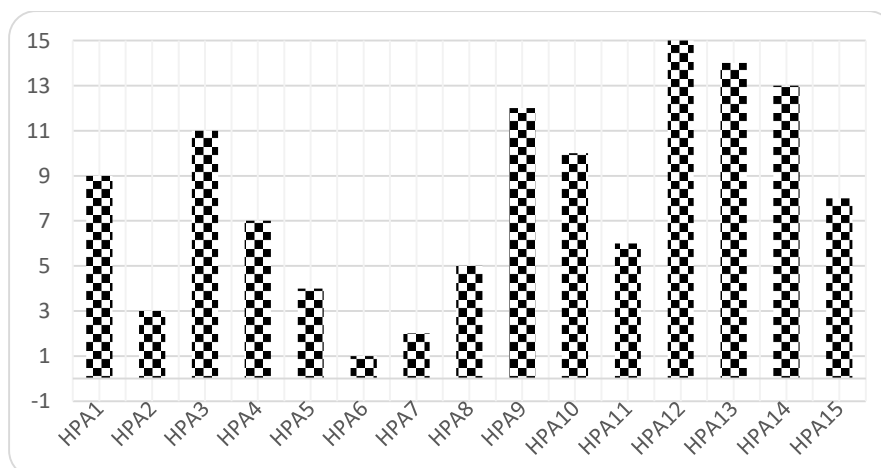


Figure 4. The final rank of MULTIMOORA method.

4 | Discussion

We proposed an MCDM methodology to analyse hydrogen production by collecting some criteria and alternatives. We made this study to achieve economic feasibility and sustainability. We manage ten criteria from the previous studies and 15 alternatives for analysis. We build the decision matrix between criteria and options by the crisp value and evaluate it by the decision-makers and experts. We compute the weights of ten criteria. The results show that cost-effectiveness has the highest weight, followed by the efficiency of energy and the policy factor, which has the least weight.

Then, we used the MULTIMOOR method to rank the alternatives and select the best one. We used the normalization matrix and weighted normalization matrix to compute three stages of MULTIMOORA-named ratio systems: a reference point and a complete multiplicative form. We obtain the rank from each stage and then calculate the final rank using the dominance strategy, as shown in Figure 4.

Then, we conducted a sensitivity analysis between ranks to show the stability of the results. We used ten weights of criteria for sensitivity analysis. We changed the weights of the criteria and then employed these weights in the MULTIMOORA method to show the stability of the results. Figure 5 shows the ten weights for the criteria. We put one factor with 0.12 weight and other factors with equal weight. Then, we compute the weights of the criteria as shown in Figure 6. The ranks show the results are stable.

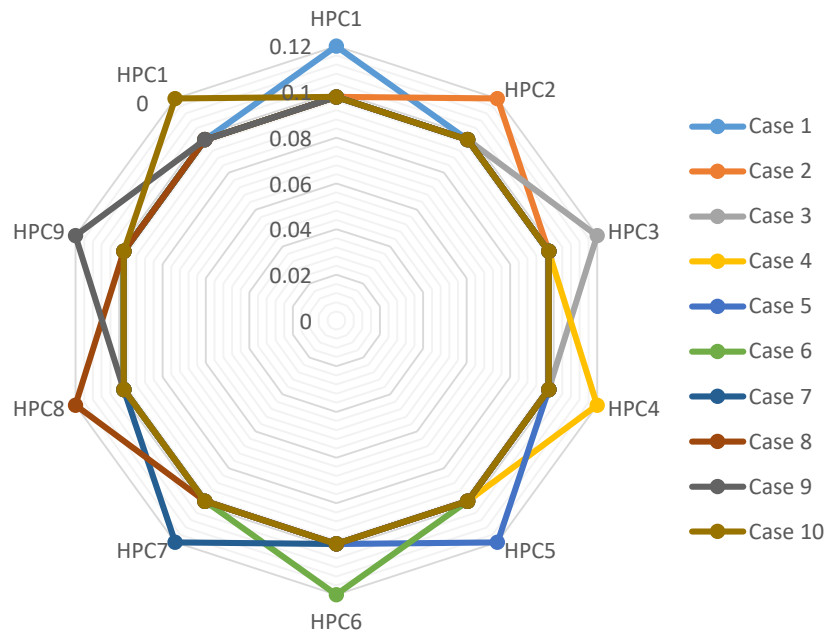


Figure 5. The weights of factors under sensitivity analysis.

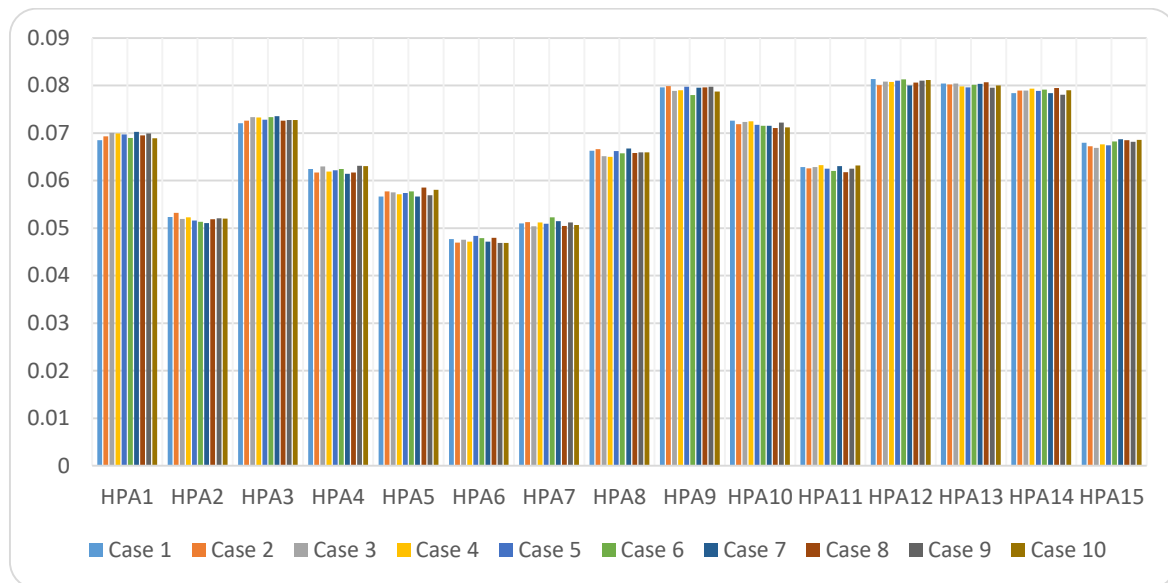


Figure 6. The rank of alternatives under sensitivity analysis.

5 | Conclusions

Hydrogen production holds significant potential for economic feasibility and the advancement of sustainable energy systems. The criteria discussed in this paper provide a comprehensive framework for evaluating hydrogen production methods. Cost-effectiveness is crucial, and efforts should be made to optimize capital investment, operational costs, and feedstock availability. Energy efficiency should be prioritized to minimize energy waste and improve the overall sustainability of hydrogen production. Minimizing carbon emissions through low-carbon or carbon-neutral feedstocks and carbon capture technologies is essential for achieving a decarbonized energy system. Sustainable feedstock sources, scalability, infrastructure compatibility, responsible water usage, life cycle assessment, technological readiness, and supportive policies and regulations are instrumental in ensuring hydrogen production's economic viability and sustainability.

Continued research and development efforts are necessary to fully realize the potential of hydrogen as a sustainable energy carrier. Technological advancements aim to improve efficiency, reduce costs, and enhance environmental performance. Collaborative efforts among industry, governments, and research institutions are crucial for driving innovation, creating supportive policy environments, and fostering the integration of hydrogen into existing energy systems. By addressing the criteria discussed in this paper, hydrogen production can become a key player in achieving economic feasibility and advancing sustainable energy systems, contributing to a cleaner and more sustainable future. We used the MCDM method for the analysis of hydrogen production. We compute the weights of the criteria and rank the alternatives.

Acknowledgments

The author is grateful to the editorial and reviewers, as well as the correspondent author, who offered assistance in the form of advice, assessment, and checking during the study period.

Author Contributaion

All authors contributed equally to this work.

Funding

This research has no funding source.

Data Availability

The datasets generated during and/or analyzed during the current study are not publicly available due to the privacy-preserving nature of the data but are available from the corresponding author upon reasonable request.

Conflicts of Interest

The authors declare that there is no conflict of interest in the research.

Ethical Approval

This article does not contain any studies with human participants or animals performed by any of the authors.

References

- [1] I. Dincer and C. Acar, "Review and evaluation of hydrogen production methods for better sustainability," *International journal of hydrogen energy*, vol. 40, no. 34, pp. 11094–11111, 2015.
- [2] H. Ishaq, I. Dincer, and C. Crawford, "A review on hydrogen production and utilization: Challenges and opportunities," *International Journal of Hydrogen Energy*, vol. 47, no. 62, pp. 26238–26264, 2022.
- [3] P. Nikolaidis and A. Poulikkas, "A comparative overview of hydrogen production processes," *Renewable and sustainable energy reviews*, vol. 67, pp. 597–611, 2017.
- [4] M. Kayfeci, A. Keçebaş, and M. Bayat, "Hydrogen production," in *Solar hydrogen production*, Elsevier, 2019, pp. 45–83.
- [5] J. A. Turner, "Sustainable hydrogen production," *Science*, vol. 305, no. 5686, pp. 972–974, 2004.
- [6] A. J. Esswein and D. G. Nocera, "Hydrogen production by molecular photocatalysis," *Chemical reviews*, vol. 107, no. 10, pp. 4022–4047, 2007.
- [7] C. M. Kalamaras and A. M. Efstathiou, "Hydrogen production technologies: current state and future developments," in *Conference papers in science*, Hindawi, 2013.
- [8] C. Acar and I. Dincer, "Review and evaluation of hydrogen production options for better environment," *Journal of cleaner production*, vol. 218, pp. 835–849, 2019.
- [9] M. Younas, S. Shafique, A. Hafeez, F. Javed, and F. Rehman, "An overview of hydrogen production: current status, potential, and challenges," *Fuel*, vol. 316, p. 123317, 2022.
- [10] X. Xu, Q. Zhou, and D. Yu, "The future of hydrogen energy: Bio-hydrogen production technology," *International Journal of Hydrogen Energy*, vol. 47, no. 79, pp. 33677–33698, 2022.
- [11] F. Dawood, M. Anda, and G. M. Shafiullah, "Hydrogen production for energy: An overview," *International Journal of Hydrogen Energy*, vol. 45, no. 7, pp. 3847–3869, 2020.
- [12] J. D. Holladay, J. Hu, D. L. King, and Y. Wang, "An overview of hydrogen production technologies," *Catalysis today*, vol. 139, no. 4, pp. 244–260, 2009.
- [13] Y. Asada and J. Miyake, "Photobiological hydrogen production," *Journal of bioscience and bioengineering*, vol. 88, no. 1, pp. 1–6, 1999.
- [14] M. El-Shafie, S. Kambara, and Y. Hayakawa, "Hydrogen production technologies overview," 2019.
- [15] J. R. Rostrup-Nielsen and T. Rostrup-Nielsen, "Large-scale hydrogen production," *Cattech*, vol. 6, no. 4, pp. 150–159, 2002.
- [16] I. Dincer, "Green methods for hydrogen production," *International journal of hydrogen energy*, vol. 37, no. 2, pp. 1954–1971, 2012.
- [17] D. Das and T. N. Veziroğlu, "Hydrogen production by biological processes: a survey of literature," *International journal of hydrogen energy*, vol. 26, no. 1, pp. 13–28, 2001.
- [18] M. Balat, "Possible methods for hydrogen production," *Energy Sources, Part A: Recovery, Utilization, and Environmental Effects*, vol. 31, no. 1, pp. 39–50, 2008.
- [19] W. K. M. Brauers, "The economy of the Belgian regions tested with MULTIMOORA," *Journal of Business Economics and management*, no. 2, pp. 173–209, 2010.
- [20] W. K. M. Brauers, A. Baležentis, and T. Baležentis, "MULTIMOORA for the EU Member States updated with fuzzy number theory," *Technological and Economic Development of Economy*, vol. 17, no. 2, pp. 259–290, 2011.
- [21] A. Hafezalkotob, A. Hafezalkotob, H. Liao, and F. Herrera, "An overview of MULTIMOORA for multi-criteria decision-making: Theory, developments, applications, and challenges," *Information Fusion*, vol. 51, pp. 145–177, 2019.
- [22] W. K. M. Brauers and E. K. Zavadskas, "Project management by MULTIMOORA as an instrument for transition economies," *Technological and economic development of economy*, vol. 16, no. 1, pp. 5–24, 2010.
- [23] W. K. M. Brauers and E. K. Zavadskas, "Robustness of MULTIMOORA: a method for multi-objective optimization," *Informatica*, vol. 23, no. 1, pp. 1–25, 2012.

- [24] W. K. M. Brauers and E. K. Zavadskas, "MULTIMOORA optimization used to decide on a bank loan to buy property," *Technological and economic development of economy*, vol. 17, no. 1, pp. 174–188, 2011.
- [25] A. Baležentis, T. Baležentis, and W. K. M. Brauers, "Personnel selection based on computing with words and fuzzy MULTIMOORA," *Expert Systems with applications*, vol. 39, no. 9, pp. 7961–7967, 2012.
- [26] T. Baležentis and A. Baležentis, "A survey on development and applications of the multi-criteria decision making method MULTIMOORA," *Journal of multi-criteria decision analysis*, vol. 21, no. 3–4, pp. 209–222, 2014.
- [27] A. Baležentis, T. Baležentis, and R. Valkauskas, "Evaluating situation of Lithuania in the European Union: structural indicators and MULTIMOORA method," *Technological and Economic Development of Economy*, vol. 16, no. 4, pp. 578–602, 2010.
- [28] C. Zhang, C. Chen, D. Streimikiene, and T. Balezentis, "Intuitionistic fuzzy MULTIMOORA approach for multi-criteria assessment of the energy storage technologies," *Applied Soft Computing*, vol. 79, pp. 410–423, 2019.
- [29] E. Aytaç Adalı and A. Tuş Işık, "The multi-objective decision making methods based on MULTIMOORA and MOOSRA for the laptop selection problem," *Journal of Industrial Engineering International*, vol. 13, pp. 229–237, 2017.